

I2112T-1

Isolator, single, 30 watt load, tunable, 125 watt input power, 138-158 MHz

- Carefully temperature compensated
- Low insertion loss
- Highly reliable design with top quality sub-components

Sinclair's 'I' series isolator and circulators offer superior performance in a compact rugged package. Careful temperature compensation and top quality components ensure high isolation with very low insertion loss over their full operating temperature range, and offer a high degree of RF and magnetic stability.

Circulators are supplied without loads. Isolators come equipped with a variety of load terminations.

Threaded holes in the steel casing allow surface mounting to any non-magnetic material. Aluminum brackets can also be supplied to isolate the unit from mounting surface to increase their stability.

A variety of models are available factory-tuned in the 70, 150, 450 and 800 MHz frequency bands.

In addition, field tunable isolators are available for the 138-174 and 406-430 or 450-470 MHz bands. Suffix 'T' on applicable model numbers designates field tunable.

www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1223 42 03 03	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet		I2112T-1	Issue: 106	Dated: 20-05-10

Electrical Specifications


Frequency Range	MHz	138 to 158
VSWR (max)		1.25:1
Insertion loss (max) Tx to Ant	dB	0.6
Insertion loss (typ) Tx to Ant	dB	0.4
Isolation (typ)	dB	35
Connectors		N (female)
Power Input	W	125
Bandwidth	MHz	5
Isolation (min)	dB	25

Ordering Information

Height, width, depth and weight excludes connectors and loads

Mechanical Specifications

Length/ Height	mm (in)	89 (3.5)
Width	mm (in)	64 (2.5)
Depth	mm (in)	36 (1.4)
Weight	kg (lbs)	0.6 (1.3)
Actual Shipping weight	kg (lbs)	0.9 (2)
Shipping dimensions	mm (in)	330x229x76 (13x9x3)

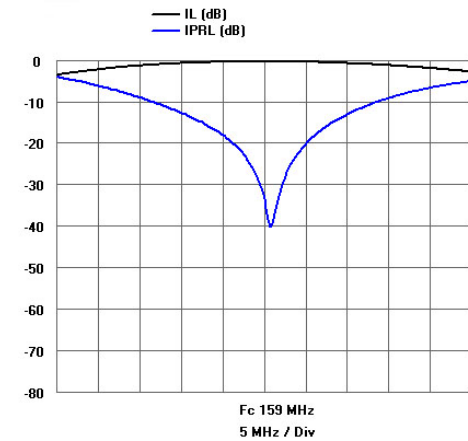

Environmental Specifications

Temperature range	°C (°F)	-30 to +60 (-22 to +140)
-------------------	---------	--------------------------

www.sinctech.com